


Lowara Domo VX Series



- Stainless steel submersible vortex pump
- Suitable for effluent wastewater treatment tanks and for sumps
- Suspended solids up to 30mm can be passed
- Single phase pumps come with float, three phase don't
- Maximum submergence depth 5m
- 10m power cable except for 7VX which has 5m power cable
- Other duty options available

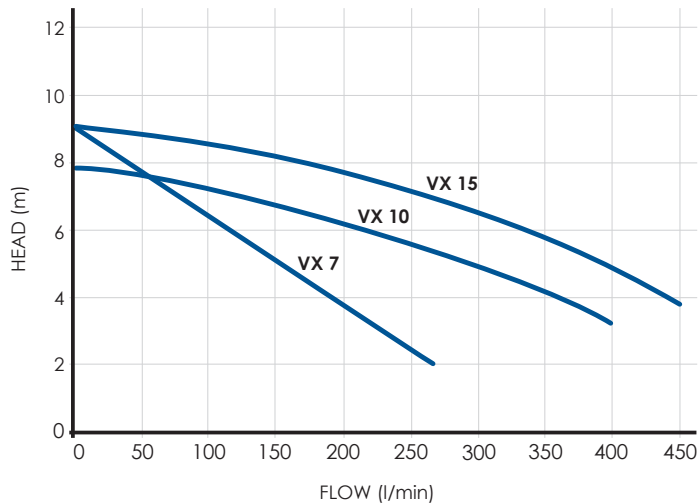

PERFORMANCE GUIDE

Code	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Outlet (mm)	Float	Max Solids (mm)
PULOWDOMO7VX	9	260	13	40	Y	335
PULOWDOMO10VX	7.5	400	11	50	Y	50
PULOWDOMO10VXT	7.5	400	11	50	N	50
PULOWDOMO15VX	9	450	13	50	Y	50
PULOWDOMO15VXT	9	450	13	50	N	50

ELECTRICAL DATA

Code	Current Type	kW	Hp	Amps	RPM/min	Capacitor (µF)	Insulation Class	Voltage (V)	Frequency (Hz)
PULOWDOMO7VX	Single	0.55	0.75	3.91	2850	16	F	230	50
PULOWDOMO10VX	Single	0.75	1	5.88	2850	22	F	230	50
PULOWDOMO10VXT	Three	0.75	1	4.09/2.36	2850	-	F	230/400	50
PULOWDOMO15VX	Single	1.1	1.5	6.11	2850	30	F	230	50
PULOWDOMO15VXT	Three	1.1	1.5	4.31/2.49	2850	-	F	230/400	50





Electric Motors | Drives | Pumps | Bearings | Power Transmission | Workshop Services
06 354 3651 | sales@soco.co.nz | www.soco.co.nz | 471 Tremaine Avenue, Palmerston North

Lowara Domo VX Series



- Stainless steel submersible vortex pump
- Suitable for effluent wastewater treatment tanks and for sumps
- Suspended solids up to 30mm can be passed
- Single phase pumps come with float, three phase don't
- Maximum submergence depth 5m
- 10m power cable except for 7VX which has 5m power cable
- Other duty options available

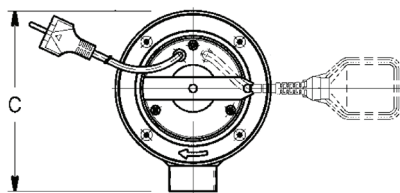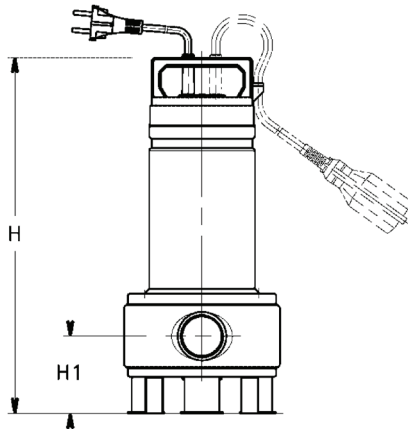

DIMENSIONS + WEIGHTS

Code	H (mm)	H1 (mm)	C (mm)	Weight (kg)
PULOWDOMO7VX	386	88	193	11
PULOWDOMO10VX	463	111.5	198	14
PULOWDOMO10VXT	463	111.5	198	11
PULOWDOMO15VX	463	111.5	198	15
PULOWDOMO15VXT	463	111.5	198	14



Electric Motors | Drives | Pumps | Bearings | Power Transmission | Workshop Services
06 354 3651 | sales@soco.co.nz | www.soco.co.nz | 471 Tremain Avenue, Palmerston North