


Shift CE Series

- Sewage cutter pump
- Suitable for raw sewage transferring and grey/black water transferring
- Ideal for lifting raw effluent into town/city sewerage network
- Complete with a single float and discharge connector
- 10m power cable

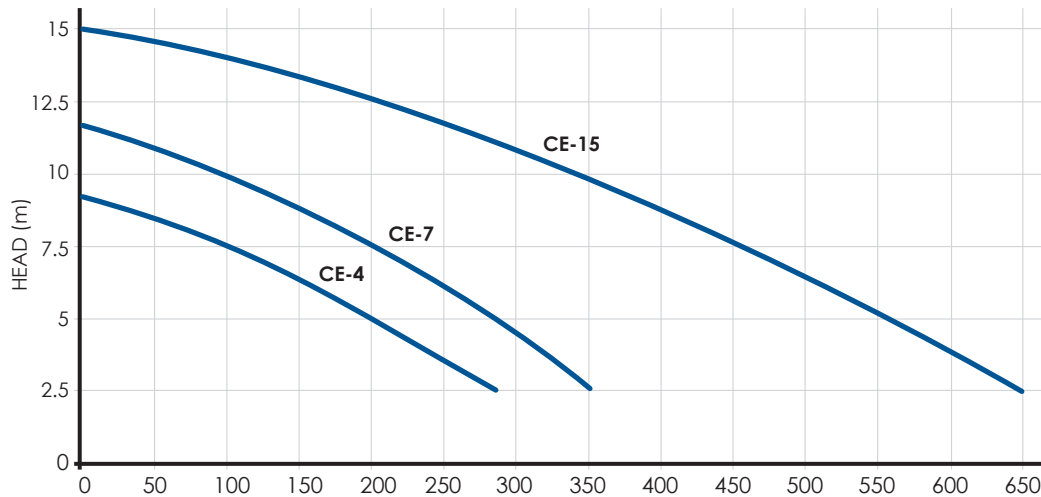

PERFORMANCE GUIDE

Code	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Outlet (mm)	Float
PUSHICE-4-50V	9	280	12	50	Y
PUSHICE-7-50V	11	350	15	50	Y
PUSHICE-15-50/80	15	650	21	50	Y



ELECTRICAL DATA

Code	Current Type	kW	Hp	Amps	RPM/min	Insulation Class	Voltage (V)	Frequency (Hz)
PUSHICE-4-50V	Single	0.4	0.5	4	2900	F	230	50
PUSHICE-7-50V	Single	0.75	1	6	2900	F	230	50
PUSHICE-15-50/80	Single	1.5	2	12	2900	F	230	50



Shift CE Series

- Sewage cutter pump
- Suitable for raw sewage transferring and grey/black water transferring
- Ideal for lifting raw effluent into town/city sewerage network
- Complete with a single float and discharge connector
- 10m power cable

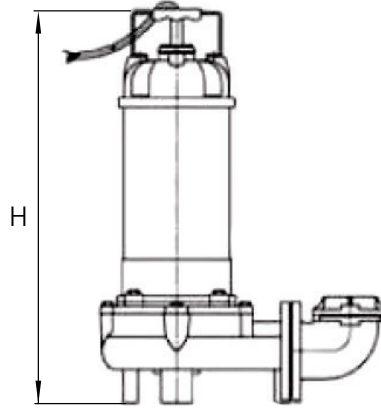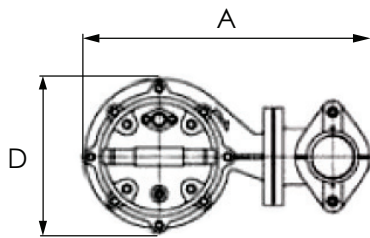

DIMENSIONS + WEIGHTS

Code	D (mm)	A (mm)	H (mm)	Weight (kg)
PUSHICE-4-50V	145	222	372	14
PUSHICE-7-50V	149	222	429	18
PUSHICE-15-50/80	212	403	541	37

