


Zenit GR Series

- Cast iron Impeller grinder submersible pump
- A triangular rotary cutter assembly is in the base to cut solid particles and fibres
- Power cable lengths; 5m with single phase and 10m with three phase
- Maximum immersion depth 10m
- Made in Italy



water technology

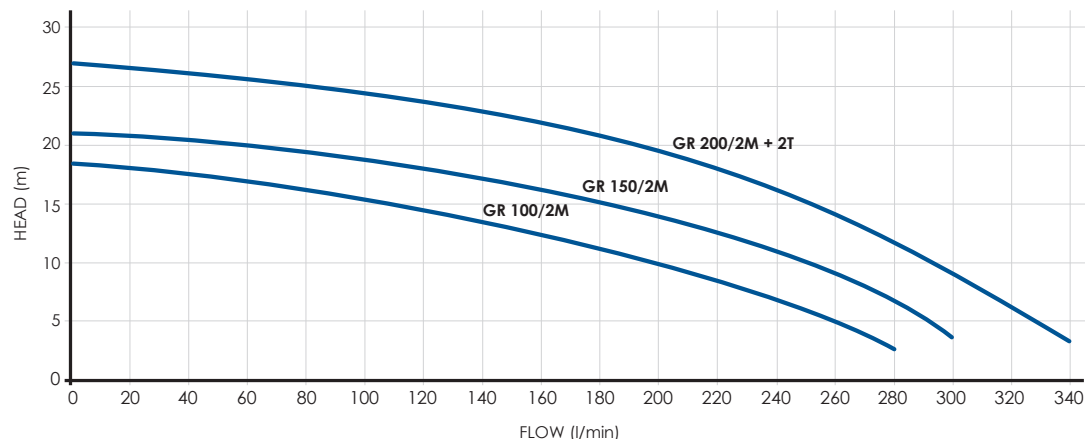

PERFORMANCE GUIDE

Code	Max Head (m)	Max Flow (l/min)	Max Pressure (PSI)	Outlet (mm)	Float
PUZENITGRBPR100/2M	17	280	24	40	Y
PUZENITGRBPR150/2M	21	300	30	40	Y
PUZENITGRBPR200/2M	27	345	38	40	Y
PUZENITGRBPR200/2T	27	345	38	40	N

ELECTRICAL DATA

Code	Current Type	kW	Hp	Amps	RPM/min	Capacitor (uF)	Insulation Class	Voltage (V)	Frequency (Hz)
PUZENITGRBPR100/2M	Single	0.75	1	5.5	2900	80	F	230	50
PUZENITGRBPR150/2M	Single	1.1	1.5	7.5	2900	80	F	230	50
PUZENITGRBPR200/2M	Single	1.5	2	10	2900		F	230	50
PUZENITGRBPR200/2T	Three	1.5	2	4.3	2900	-	F	400	50




Electric Motors | Drives | Pumps | Bearings | Power Transmission | Workshop Services
 06 354 3651 | sales@soco.co.nz | www.soco.co.nz | 471 Tremaine Avenue, Palmerston North

Zenit GR Series

- Cast iron Impeller grinder submersible pump
- A triangular rotary cutter assembly is in the base to cut solid particles and fibres
- Power cable lengths; 5m with single phase and 10m with three phase
- Maximum immersion depth 10m
- Made in Italy



water technology

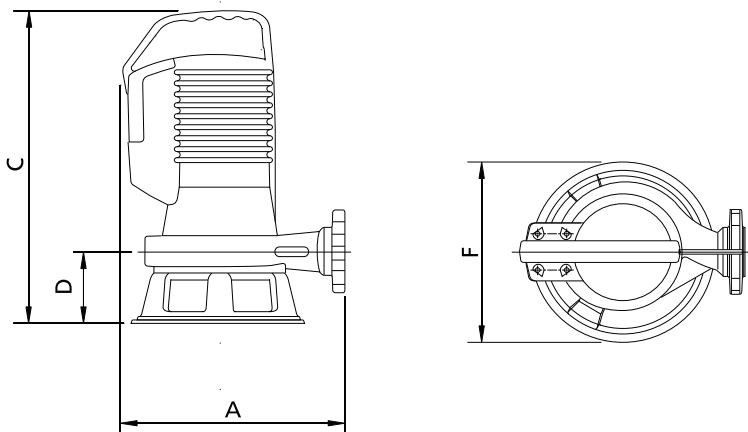

DIMENSIONS

Code	A (mm)	C (mm)	D (mm)	F (mm)	Weight (kg)
PUZENITGRBPR100/2M	270	365	95	220	19
PUZENITGRBPR150/2M	285	410	100	230	24
PUZENITGRBPR200/2M	285	410	100	230	25
PUZENITGRBPR200/2T	285	410	100	230	25



Electric Motors | Drives | Pumps | Bearings | Power Transmission | Workshop Services
06 354 3651 | sales@soco.co.nz | www.soco.co.nz | 471 Tremaine Avenue, Palmerston North